

# PM-3250Z/PM-3350Z/PM-3500Z/PM-3650Z 6 Zone Digital Mixer Amplifier with Remote Paging

## Product ID:

PM-3250Z/PM-3350Z/PM-3500Z/PM-3650Z



## Short Description

6 Zones speaker output

Rated output power: 250W/350W/500W/650W

Combined with MP3/FM tuner/Bluetooth

4 MIC input, MIC 2-4 with 48V phantom power

1 AUX input, 1 AUX output

1 EMC input, 1 siren trigger input

Support remote paging microphone

## Description


### High-Performance Audio Solutions for Professional Settings!

Enhance your audio setup with [LYINTL](http://www.lyintl.com)'s PM-3250Z/PM-3350Z/PM-3500Z/PM-3650Z, powerful 250W/350W/500W/650W digital mixer amplifiers designed to deliver superior sound quality and versatility. Ideal for large venues, conference rooms, and public address systems, the amplifiers are engineered to meet the demands of professional audio environments.

## Key Features

- **Robust 250W/350W/500W/650W Rated Power Output**  
Delivers powerful and clear audio, suitable for large spaces and high-demand applications.
- **Versatile Mixing Capabilities**  
Equipped with multiple input options, including microphones, lines, and AUX inputs, allowing seamless integration with various audio sources like USB/SD card, Bluetooth player and FM tuner.
- **Digital Signal Processing (DSP)**  
Advanced DSP technology ensures optimal sound quality with customizable audio settings for different environments.
- **User-Friendly Interface**  
Easy-to-use control panel with intuitive knobs and buttons for quick adjustments and fine-tuning.
- **Durable Construction**  
Built with high-quality materials to withstand rigorous use and ensure long-lasting performance.
- **Convenient Remote Paging**  
The amplifiers support paging via 6 zone remote paging microphones.

## System Connection Diagram

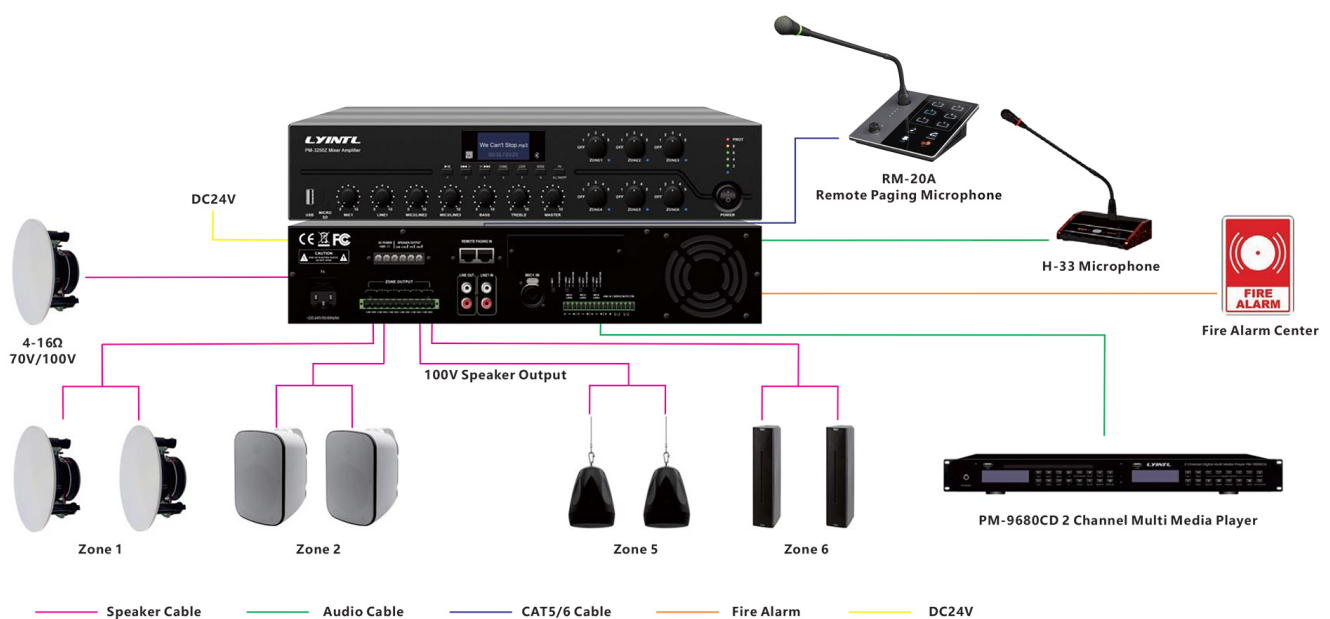

## Applications

- **Conference Rooms**  
Enhance speech clarity and audio quality during meetings and presentations.
- **Educational Institutions**  
Perfect for auditoriums and lecture halls, providing clear sound for speeches and

events.

- **Commercial Spaces**

Ideal for malls, restaurants, and retail stores, ensuring background music and announcements are heard clearly.

- **Public Address Systems**

Suitable for large-scale public address systems, delivering clear and powerful sound across vast areas.

Upgrade your audio system with [LYINTL](#)'s PM-3250Z(250W) / PM-3350Z(350W) / PM-3500Z (500W) / PM-3650Z (650W) Digital Mixer Amplifier and experience unmatched sound quality and reliability. Perfect for any professional audio setup, the amplifiers ensure your sound is always at its best.

### Specification

Model		PM-3250Z	PM-3350Z	PM-3500Z	PM-3650Z
Rated power		250W	350W	500W	650W
Input sensitivity	Mic 1	5mV $\pm$ 1mv (Balanced XLR Input)			
	Mic 2,3,4	5mV $\pm$ 1mv (Unbalanced Phoenix Jacks)			
	AUX 1	350mV $\pm$ 50mv (Unbalanced RCA Input)			
	AUX 2	350mV $\pm$ 50mv (Unbalanced Phoenix Jacks)			
	EMC	350mV $\pm$ 50mv (Unbalanced Phoenix Jacks)			
Frequency response	Mic	120Hz?12kHz ( $\pm$ 3dB)			
	AUX	80Hz?15kHz ( $\pm$ 3dB)			
Adjustment range	Treble	10dB ( $\pm$ 2)			
	Bass	10dB ( $\pm$ 2)			
Line output		4-16?,70V,100V (fixed voltage)			
T.H.D.		<1%			
Phantom power		+48V			
Power supply		AC230V 50/ 60Hz			
Current		2A	3A	3A	4A
Fuse		F3.15AL	F6.3AL	F6.3AL	F8AL
Protection		DC temperature, overcurrent, short circuit			
Net weight		8.6kg	9.0kg	10.1kg	11.0kg
Gross weight		9.8kg	10.2kg	11.3kg	12.2kg
Product dimension (DxWxH)		43x39x8.8cm			
Packing dimension (DxWxH)		54.5x50x16.5cm			

Product Gallery

