

# X-832 32 Zone Remote Paging Microphone

**Product ID: X-832**



## **Short Description**

Zone selector switch, 4 groups & 32 zones

Talk & chime switch

Power, Signal, Clip, Busy indicators

RJ45 connector with X-808

## **Description**

### **Controls**


- Zone selector switch, 4 groups A.B.C.D & 32 zones
- Talk & Chime switch
- Level control volume
- Slide switch for Lock

### **Connectors**

- RJ45 connector with X-808 main unit

### **Indicators**

Power, Signal, Clip, Busy

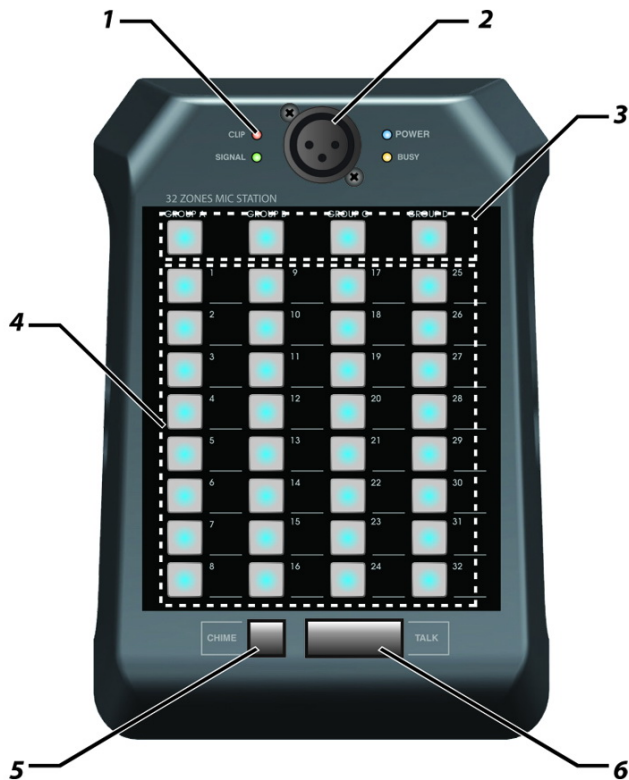

### 1. INDICATOR

Power(Blue), Signal(Green), CLIP(Orange), Busy(Red)

### 2. MIC INPUT

Condenser MIC input jack

It is recommended to use a balanced MIC

### 3. GROUPING

User programable ZONE assignment

Press and hold GROUP key allow to assign zone group,you can select each zone when group

LED flashing

Press and hold again for store into memroy

### 4. ZONE SELECTION BUTTON

Turn on if pressing the switch to select the area to broadcast and turns off if pressing it again


### 5. PRE-ANNOUNCE CHIME BUTTON

Press and hold this button for locking the selected zone

Press this button for playing the pre-announcement chime

### 6. TALK

Press and hold the button to start broadcasting after selecting the broadcasting zone.  
Releasing the button again to end broadcasting.  
During broadcast, letter “R” is displayed on the main unit X-808

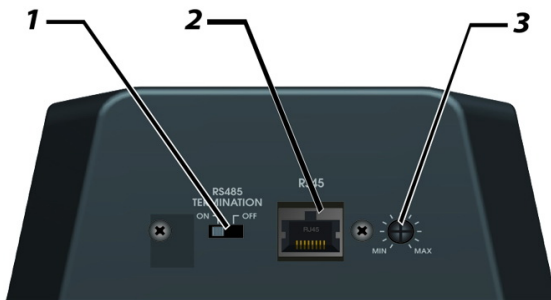

### 1. Termination

When multiple X-832 is connected to X-808, this switch needs to be turned ON for RS485 termination

### 2. C-PORT JACK

Terminal to connect to X-808 main unit via UTP CAT5  
Suggest not more than 300 meters distance to X-808

### 3. OUTPUT VOLUME

MIC and Chime broadcasting level can be adjusted by this potentiometer

## Specification

<b>Model</b>	<b>X-832</b>
Rated Output Level / Impedance	0dB / 600 $\Omega$ Balanced
Input sensitivity / Impedance	- 60dB~ / 20k $\Omega$ Balanced
Frequency Response (-1dB)	45Hz-15kHz
T.H.D	<0.1%
Signal to Noise Ratio	>90 dB
Number of Zones	32 zones
Net Weight	0.86kg
Dimensions (WxHxD)	140x60x205mm (base only)

## Product Gallery

