Phone: +86-20-39390663 - Email: sales@lyintl.com

PM-35UB/PM-60UB/PM-120UB/PM-250UB Mini Digital Mixer Amplifier with USB/FM/Bluetooth

Product ID: PM-35UB/PM-60UB/PM-120UB



Short Description

Rated power: 35W/60W/120W/250W Combined with MP3/FM/bluetooth 2 MIC input, 2 AUX input

Description


1.5U designed Mini digital amplifier with USB/FM and Bluetooth;

70V/100V and 4-16? speaker output are available;


2 AUX input; MIC2 is XLR type in rear panel, Phantom power is available for MIC2;

1 EMC signal input for emergency purpose;

Individual volume control for each input, the amplifier also provides bass and treble control.

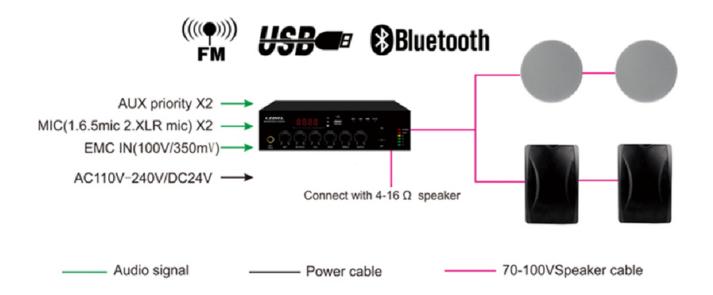



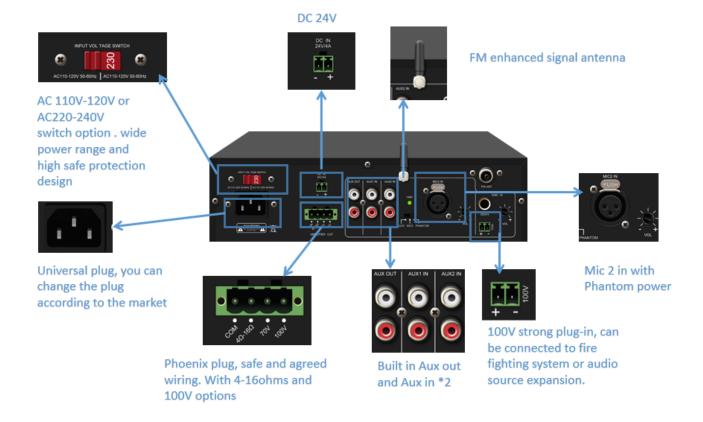

Specification

Model	PM-35UB	PM-60UB	PM-120UB	PM-250UB
Rated output	35W	60W	120W	250W
power				
Output	70V/100V/4-16?			
MIC1 input	$10mV\pm1mV$		$10 \text{mV} \pm 1 \text{mV}$	
sensitivity				
MIC2 input	$10mV\pm1mV$		15mV±1mV	
sensitivity				
AUX1 input	$360mV\pm10\%$		$350 \text{mV} \pm 10\%$	
sensitivity				
AUX2 input	$360mV\pm10\%$		$350 \text{mV} \pm 10\%$	
sensitivity				
MIC frequency	200Hz-10KHz (±	3dB)		
response				
AUX frequency	80Hz-16KHz (±3	100Hz-16KHz		
response				(±3dB)
Noise	<10mV			
Distortion	<1% 1KHz			
Treble	10dB (±2)			
adjustment				

Bass adjustment	10dB (±2)						
Power supply	AC110-240V 50/60Hz						
Product	198x247x66		250×230×66				
dimension (mm)							
Packing	302x343x121 (1p	363×292×106					
dimension		(1pc)					
(mm)							
Net weight	2.55	2.6	3.0	3.0			
(Kg)							
Gross weight	3.2	3.25	3.7	3.7			
(Kg)							

Product Gallery

