

PM-35UB/PM-60UB/PM-120UB/PM-250UB Mini Digital Mixer Amplifier with USB/FM/Bluetooth

Product ID: PM-35UB/PM-60UB/PM-120UB



Short Description

Rated power: 35W/60W/120W/250W

Combined with MP3/FM/bluetooth

2 MIC input, 2 AUX input

Description


1.5U designed Mini digital amplifier with USB/FM and Bluetooth;


70V/100V and 4-16 Ω speaker output are available;

2 AUX input; MIC2 is XLR type in rear panel, Phantom power is available for MIC2;

1 EMC signal input for emergency purpose;

Individual volume control for each input, the amplifier also provides bass and treble control.

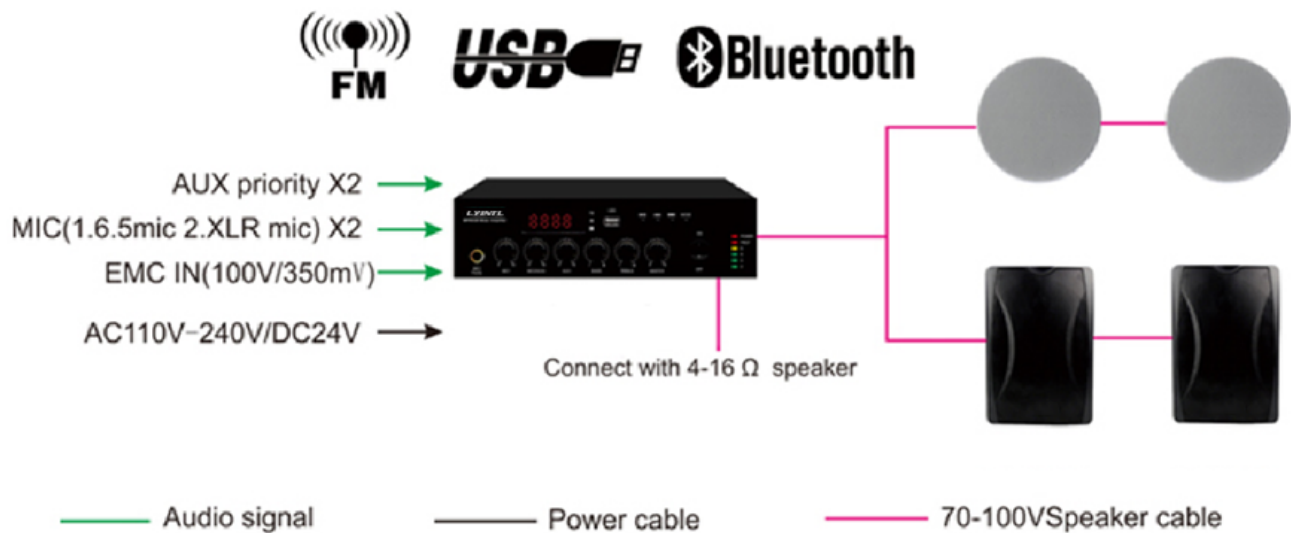

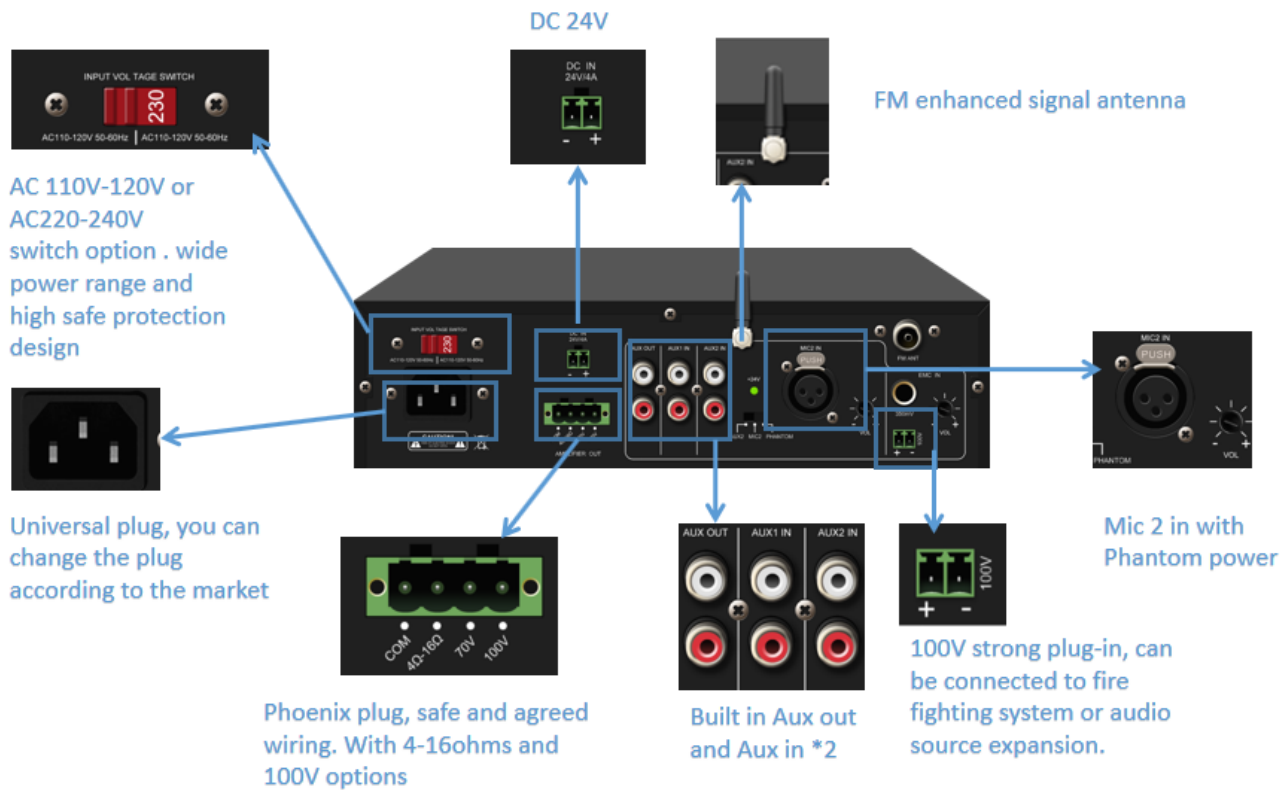

Specification

Model	PM-35UB	PM-60UB	PM-120UB	PM-250UB
Rated output power	35W	60W	120W	250W
Output	70V/100V/4-16?			
MIC1 input sensitivity	10mV±1mV		10mV±1mV	
MIC2 input sensitivity	10mV±1mV		15mV±1mV	
AUX1 input sensitivity	360mV±10%		350mV±10%	
AUX2 input sensitivity	360mV±10%		350mV±10%	
MIC frequency response	200Hz-10KHz (±3dB)			
AUX frequency response	80Hz-16KHz (±3dB)			100Hz-16KHz (±3dB)
Noise	<10mV			
Distortion	<1% 1KHz			
Treble adjustment	10dB (±2)			

Bass adjustment	10dB (±2)			
Power supply	AC110-240V 50/60Hz			
Product dimension (mm)	198x247x66		250×230×66	
Packing dimension (mm)	302x343x121 (1pc)		363×292×106 (1pc)	
Net weight (Kg)	2.55	2.6	3.0	3.0
Gross weight (Kg)	3.2	3.25	3.7	3.7

Product Gallery

