#### Phone: +86-20-39390663 - Email: sales@lyintl.com

# HS-8328 8 Zone Intelligent Multi-room Music System

**Product ID:** HS-8328



### **Short Description**

Build-in MP3 player and digital tuner 8 independent stereo output Support extension up to 72 zones max

#### **Description**



HS-8328 central control multi-room music system has below special functions:


- ? Built-in MP3 player, FM & AM digital tuner, with DVD, PC, TV, AUX audio input interface
- ? Support external USB port MP3 program input (flash disk, portable hard disk, MP3 player)
- ? RJ45 output connection
- ? 8 independent stereo audio output interfaces for 8 zones, support extension up to 72 zones max; independent volume / tone control; optional audio sources input for each zone
- ? 1 channel of DVD audio input interface, 2 channel of AUX audio input interface
- ? Console panel control and remote control available
- ? Timing control is available for each zones, up to 100 timing points can be programmed each day, and 7 days per week
- ? Every zone adopts the stereo output, rated output power:


Zone No.1: 2x100W

Zone No.2-8: 2x30W

Extending power amplifier, four zones rated output power: 2x30W

- ? Equipped with RS-232 communication interface and TCP/IP network interface, can interlink with intelligent central control systems or intelligent home systems
- ? Infrared learning function for remote control of external audio equipment
- ? All-digital audio processing technology which can realize Hi-Fi sound quality
- ? Support online software upgrading and time calibration automatically
- ? Equipped with brand-new control software including IOS and ANDROID platforms

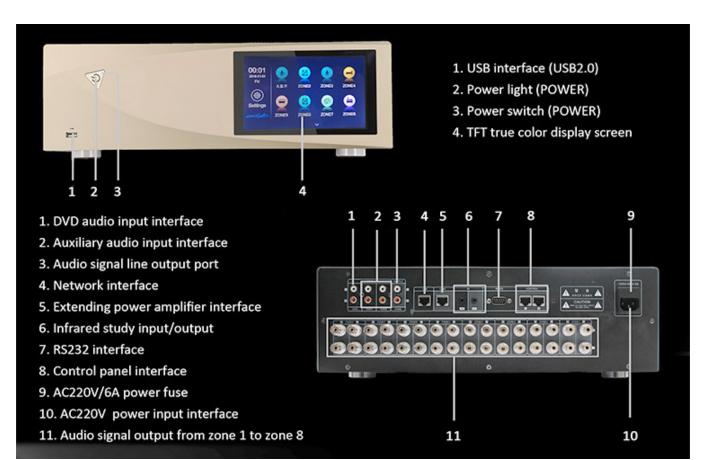

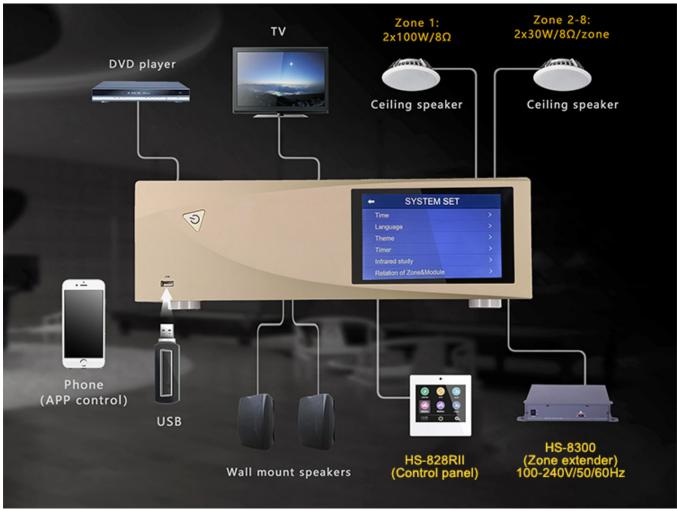

**Specificaiton** 

em	Parameter
uantity	8 zone
Line input sensitivity	520mV (±50mV)
Line input resistance	>10k?
Rated output power	Zone 1: 2×100W/8?
	Zone 2-8: 2×30W/8?
Frequency response	20Hz-20kHz (±0.5dB)
T.H.D	<0.3% (f=1kHz, 1/3 of
	rated output power)
S/N	>81dB
AUX audio output	Stereo output: 520mV
	(±50mV)
rotection	Output short circuit,
	overloading, direct current
	protection
supply	AC220-240V/50-60Hz
power	600W
rotection	AC220V/F6A
on (LxWxH)mm	430×345×132
on (LxWxH) mm	540×540×230
ght (Kg)	14.6
ight (Kg)	19.0
	Line input sensitivity Line input resistance Rated output power  Frequency response T.H.D  S/N AUX audio output  rotection  supply power rotection on (LxWxH)mm on (LxWxH) mm ght (Kg)

## **Product Gallery**







### HS-8328 System Connection Diagram

