

H-W02 Professional Intercom Microphone

Product ID: H-W02



Short Description


Indicator light on active microphone
Volume knob and on/off switch of monitor speaker
With REC output

Description

Window intercom system, ease communication through counter windows, glass partitions or windows in box offices, banks, offices, control points, private accesses, car parks, etc.

Clear sound for voice.

Easy-to-use.

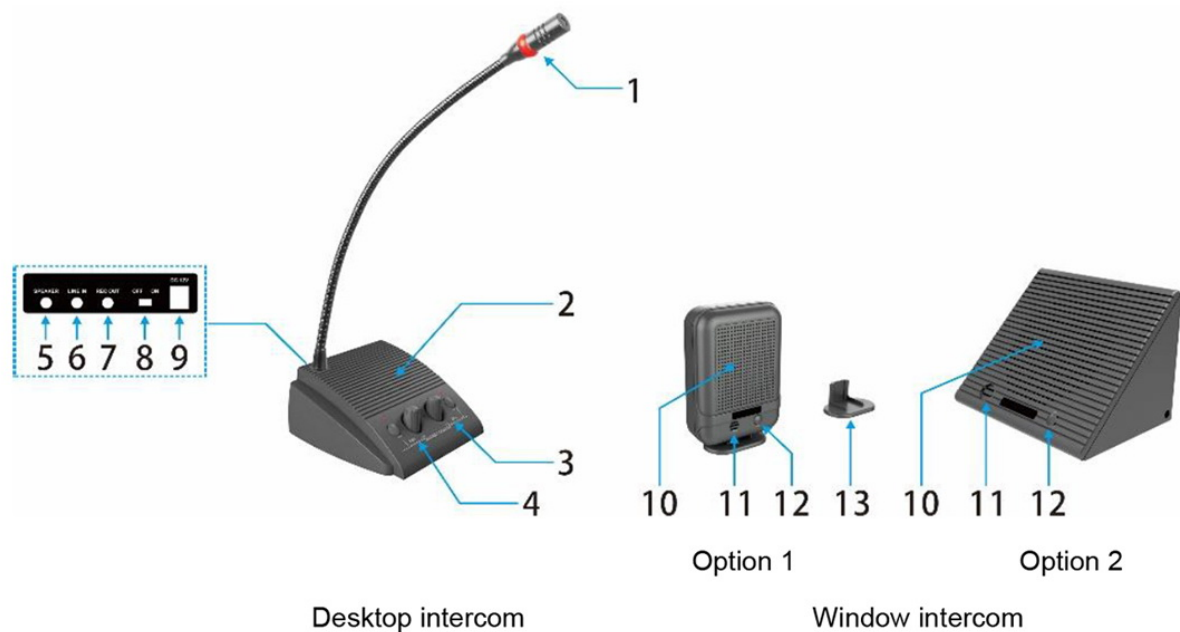

1. Electret condenser cardioid microphone;

Indicator light on active microphone: when microphone is active, indicator light switches on

2. Monitor speaker of desktop intercom, to monitoring the sound from windows microphone

3. Volume knob and on/off switch of monitor speaker for desktop intercom (with indicator)

4. Volume knob and on/off switch of monitor speaker for windows intercom (with indicator)

5. SPEAKER: connection for window intercom, 3.5mm stereo jack

6. LINE IN: 3.5mm jack for reproduction through window intercom

7. REC OUT: 1xREC, 3.5mm stereo jack

8. Power on/off switch

9. Power input: DC12V

10. Monitor speaker of window intercom, to monitor the sound from desktop microphone

11. Microphone of window intercom

12. Call: Press this key to give call indicator to desktop intercom

13. Bracket for window intercom (Option 1)

Specification

TECHNICAL DATA SHEET	
CHARACTERISTICS	Window intercom microphone Quality sound with anti-feedback processor Duplex two-way sound with communication control Independent volume knob for window and interior intercom Easy to use
CONTROLS	On/off Independent window and interior volume
FUNCTIONS	Automatic communication control, internal intercom priority Anti-feedback processor LED power indicators on desktop intercom Power 2 x 5 W Optimum distance for speaking into window intercom microphone 20 cm The window intercom can be hung or stuck on the glass with the provided Double-sided adhesive pads.
INPUTS	1 microphone-loudspeaker connection for window intercom, 3.5 mm stereo jack 1 line, 3.5 mm jack for reproduction through window intercom
OUTPUT	1 REC, 3.5mm stereo jack
POWER SUPPLY	12V DC, 1 A with adapter included
CABLE	2.4m cable for window intercom
DIMENSIONS	Desktop intercom: 141 x 62 x 142mm depth Gooseneck microphone: 420mm height Window intercom: Option 1: 84 x 124 x 37mm depth (with bracket)

	Option 2: 145 x 100 x100mm depth
WEIGHT	1.2 kg
ACCESSORIES	Foam windshield Adhesive pad for window intercom installation

Product Gallery

