


IW-60/IW-80 6.5"/8" 8? 2-way Frameless Magnetic Grille In-wall/In-ceiling Speaker

Product ID: IW-60/IW-80

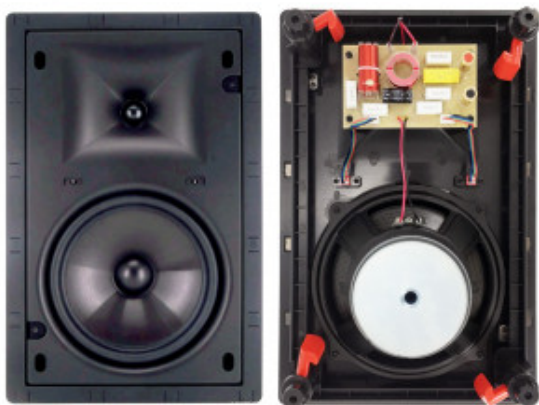

Short Description

Power handling (RMS): 40W/50W

Impedance: 8?

Speaker driver: 6½" or 8" graphite woofer + 1" Titanium tweeter

Frameless magnetic grille

Description

IW-60 comes with a 6.5 inch low frequency driver while IW-80 comes with a 8 inch low frequency driver.

Both has a 1" high frequency Titanium dome tweeter driver, making the speakers an ideal choice for essential in-wall speakers system with optimal audio performance.

IW-60:

Power Handling (RMS): 40W

Woofer: 6.5'' (165 mm) Graphite cone, rubber surround

Tweeter: 1'' (25 mm) Titanium dome

IW-80:

Power Handling (RMS): 50W

Woofer: 8'' (165 mm) Graphite cone, rubber surround

Tweeter: 1'' (25 mm) Titanium dome

Specification

Model	IW-60	IW-80
Power Handling (RMS)	40W (80W program)	50W (100W program)
Impedance	8?	
Sensitivity	85dB	
Frequency response	46Hz-20KHz	40Hz0-20KHz
Woofer speaker (LF)	6.5" (165 mm) Graphite cone, Rubber Surround	8" (203 mm) Graphite cone, Rubber Surround
Tweeter speaker (HF)	1'' (25 mm) Titanium dome	
Product dimension (mm)	361 x 233 x 100	400 x 263 x 100
Installation cut out (mm)	330 x 202	374 x 231.5
Frame material	ABS	
Grille	Frameless magnetic grille	
Color	White / Black	
Product net weight	-	-
Gross weight	-	-
Packing dimension (cm)	-	-

Product Gallery

