




LY INTERNATIONAL ELECTRONICS

WALL MOUNTED SPEAKER

W-503T SPECIFICATIONS



General Specification	
Type	W-503T
Frequency Response	120-10KHZ
Sensitivity(1m/1W)	92dB
Power Handling	6W
Power taps	0.75W/1.5W/3W/6W
Line input	100V
Dimension(L*W*H)	160*160*60mm
Physical Specification	
Material	Iron
Component	5"
Finished Colour	Grey(RAL 7035)
Character	non-flammable
Unit Weight	1.4Kg
Speaker Specification	
Voice Coil Size	PSV 14.28*0.1*2layer
DC Impedance	7.3 Ω
Former	Paper
Magnet	Ferrite(106g) φ 55 *24*10 (Y30)
Basket	Iron
Cone Material	Paper
Spider	Cloth
Dust cap	Paper
Net Weight	220g

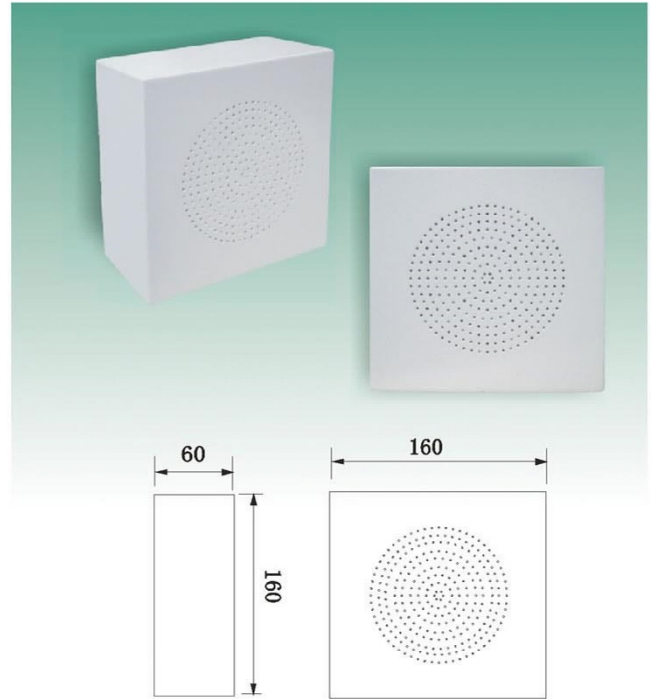

Conform to
Fire protection Norm
BS 5839

Corrosion-resistant powder coating!
Ceramic clamp+thermofuse
Ball proof!
Vandal proof!

BS 5839: Is the main British standard used by fire authorities and building control officers in the fire detection. This standard includes the code of practice for system design, the installation, the commissioning and the maintenance.

