


# M-9136 Stereo IP Network Terminal with 2\*20W Amplifier

**Product ID:** M-9136

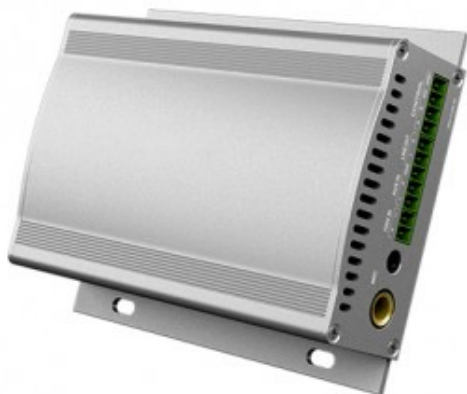

## Short Description

Build in 2\*20W stereo amplifier  
Off-line working available  
Support external audio input

## Description

The device is a multi-functional network audio decoding player integrated with multi-channel audio input and remote intercom. It can decode and play built-in and network audio sources, can accept the server and other network equipment access and control. Also, it has offline playing function, can run independently from the network.

? Build in 2\*20W stereo digital amplifier

? Based on TCP/IP protocol, multi-function pre-player

? Support separated running form host and network

? Audio source: AUX, 100V line input, MIC, network audio, built-in source

? Support large capacity storage, built-in program source

? Audio format: MP3, WMA, WAV, FLAC, APE, etc.

? MIC sensitivity adjustable, with whistle suppression, echo removal technology

? Support remote one-button paging and intercom

## Specification

Item	Name	Specification
Audio input	MIC input sensitivity	10mV
	AUX input sensitivity	1.0V
	100VInput sensitivity	100V
	Internet port	RJ45 10/100M (support POE, M-9136E)
Audio output	LINE output	1.0V
Control interface	I/O port input	5-24V DC? photoelectric isolation
	I/O port output	Normal delay input, 30V/1A?AC/DC
	RS485	19200bps
	VDD input	12-24V
Other specification	Power input	?100-240V AC; ?12-24V DC; ?POE (M-9136E) Note: support all the electric mode above
	Dimension (mm)	35*125*100
	Net weight (Kg)	0.5

## Product Gallery

