

WS-302BT 5" 2*10W 2 Channel Bluetooth Wireless Ceiling Speaker



Product ID: WS-302BT



Short Description

Rated power: 2*10W @ 8Ω

Speaker driver: 5¼" paper cone

With Bluetooth input

With 3.5mm AUX input

Description

This bluetooth is designed with digital Class D amplifier, build-in Bluetooth receiver.

1. Built-in digital Class D amplifier:

WS-301BT: 1CH amplifier, 1*10W

WS-302BT: 2CH amplifier, 2*10W

WS-304BT: 4CH amplifier, 4*10W



2. Built-in Bluetooth for wireless music streaming – works with almost all Bluetooth devices (iphones, Androids, smart phones, ipads, tablets, etc).

3. Support all Bluetooth protocols: HFPV1.5, A2DPV1.2, AVRCPV1.4, HSP1.2,

GAVDP1.2, IOP.

4. With 3.5mm stereo AUX local input.
5. DC12V power supply with AC adapter.
6. Full-range 5¼" dual-cone dynamic speaker driver.
7. Frame-mounted spring-loaded clamps provide secure, low-noise connections and easy installation.
8. Attractive color ABS resin finish with white grille suits any decor.

This speaker is an ideal economy choice for industrial and commercial applications in hotels, shops, home, classroom, restaurants, coffee bars and where background music is needed.

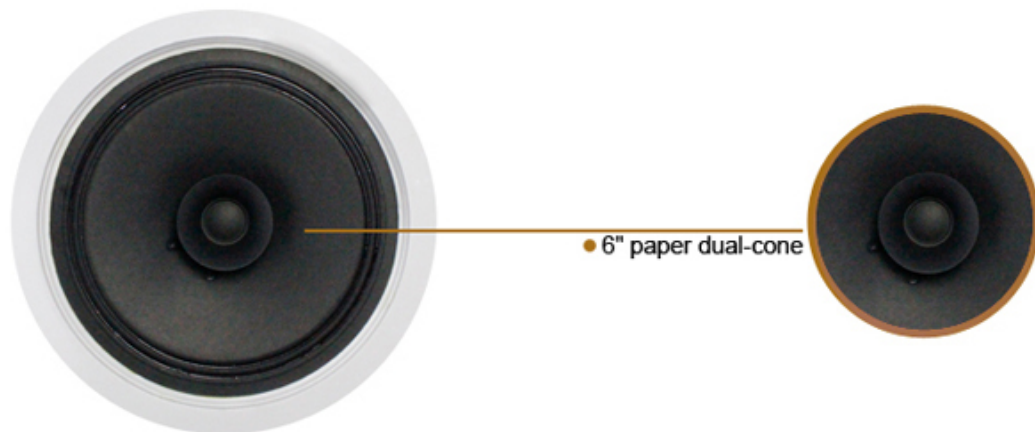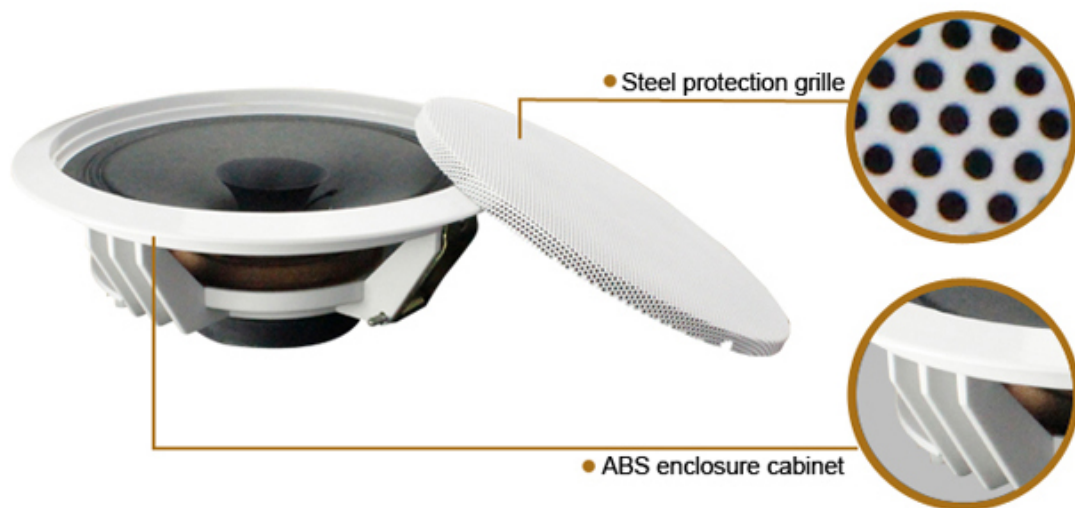


Specification


Model	WS-302BT
Rated power	10W×2@8 ohm
Speaker driver	5¼" dual-cone
Amplifier	2-channel digital amplifier (Class D)
Material	ABS enclosure, metal grille
Frequency response	120Hz-15KHz/1W, ±3dB
THD	<0.05% at 1KHz, 1/3 rated power
S/N	>70dB
Protocol	HFPV1.5, A2DPV1.2, AVRCPV1.4, HSP1.2, GAVDP1.2, IOP
Power supply	AC110V-240V/50Hz-60Hz / DC12V
Power consumption	25W-50W
Product dimension (mm)	?188*76
Installing dimension (mm)	?170
Net weight	1.95Kg (main loudspeaker 1Kg, sub loudspeaker 0.95Kg)
Gross weight	13kg (8 sets)
Packing dimension (mm)	48x45x46

Connection

WS-302BT
Rated power: 2*10W

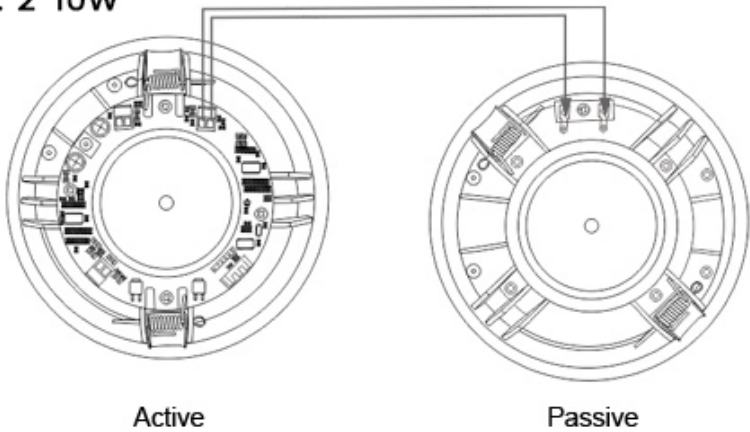

WS-304BT
Rated power: 4*10W

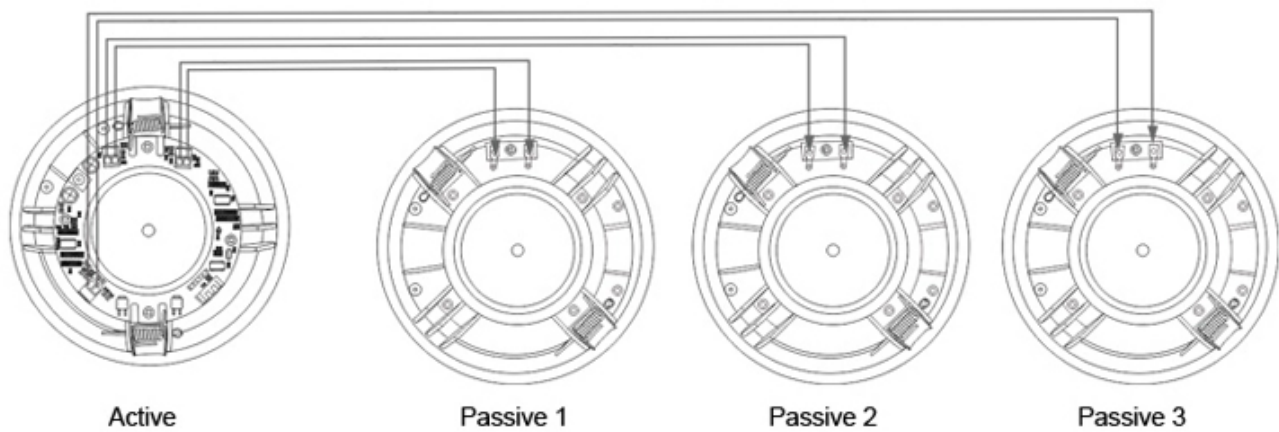

Product Gallery



