Phone: +86-20-39390663 - Email: sales@lyintl.com

HS-8328 8 Zone Intelligent Multi-room Music System

Product ID: HS-8328



Short Description

Build-in MP3 player and digital tuner 8 independent stereo output Support extension up to 72 zones max

Description



HS-8328 central control multi-room music system has below special functions:


- ? Built-in MP3 player, FM & AM digital tuner, with DVD, PC, TV, AUX audio input interface
- ? Support external USB port MP3 program input (flash disk, portable hard disk, MP3 player)
- ? RJ45 output connection
- ? 8 independent stereo audio output interfaces for 8 zones, support extension up to 72 zones max; independent volume / tone control; optional audio sources input for each zone
- ? 1 channel of DVD audio input interface, 2 channel of AUX audio input interface
- ? Console panel control and remote control available
- ? Timing control is available for each zones, up to 100 timing points can be programmed each day, and 7 days per week
- ? Every zone adopts the stereo output, rated output power:


Zone No.1: 2x100W

Zone No.2-8: 2x30W

Extending power amplifier, four zones rated output power: 2x30W

- ? Equipped with RS-232 communication interface and TCP/IP network interface, can interlink with intelligent central control systems or intelligent home systems
- ? Infrared learning function for remote control of external audio equipment
- ? All-digital audio processing technology which can realize Hi-Fi sound quality
- ? Support online software upgrading and time calibration automatically
- ? Equipped with brand-new control software including IOS and ANDROID platforms

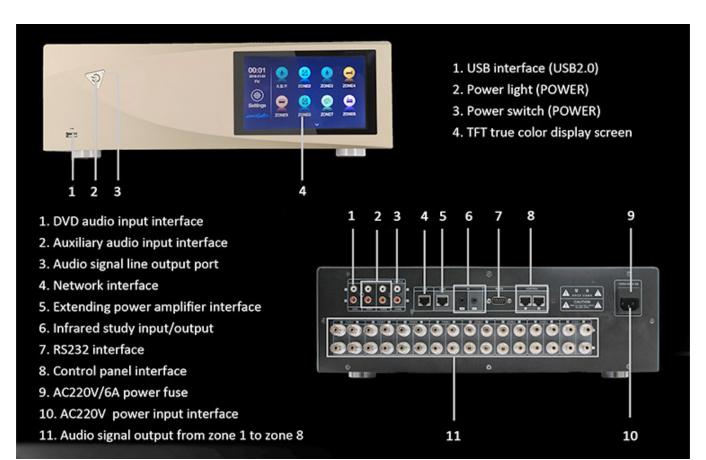

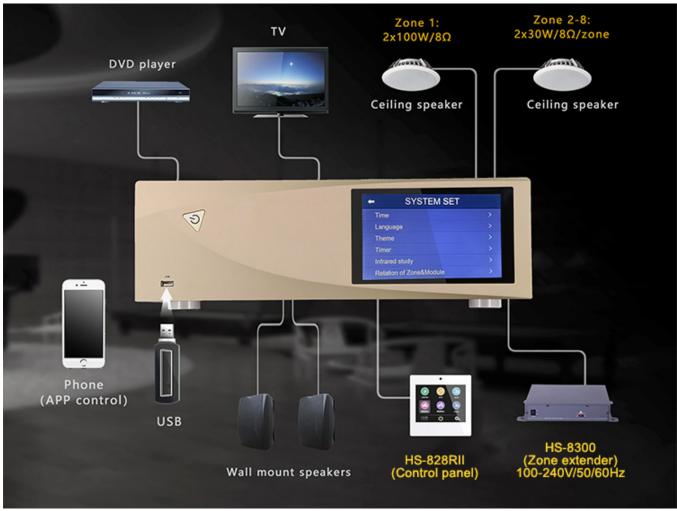

Specificaiton

specification		
Item		Parameter
Zone quantity		8 zone
Audio indicator	Line input sensitivity	520mV (±50mV)
	Line input resistance	>10k?
	Rated output power	Zone 1: 2×100W/8?
		Zone 2-8: 2×30W/8?
	Frequency response	20Hz-20kHz (±0.5dB)
	T.H.D	<0.3% (f=1kHz, 1/3 of
		rated output power)
	S/N	>81dB
	AUX audio output	Stereo output: 520mV
		(±50mV)
Output protection		Output short circuit,
		overloading, direct current
		protection
Power supply		AC220-240V/50-60Hz
Total power		600W
Power protection		AC220V/F6A
Product dimension (LxWxH)mm		430×345×132
Packing dimension (LxWxH) mm		540×540×230
Net weight (Kg)		14.6
Gross weight (Kg)		19.0

Product Gallery







HS-8328 System Connection Diagram

